


Partial Profile 55° - BSP(G), BSF, BSW

Same insert for internal and external thread

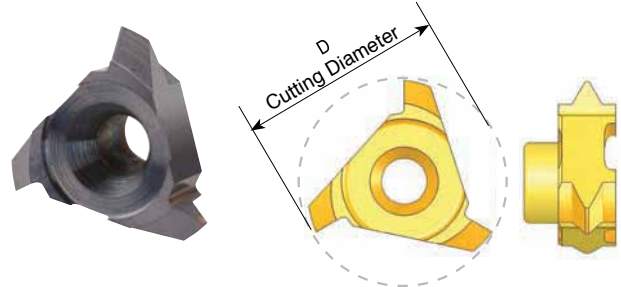


Insert Type	Pitch Range TPI	Ordering Code	D	Thread Dia. (min)	Holder Code
C10	19-14	C10 G55	10.0	$\varnothing \geq 13$	H1, 2, 12
C12	28-19	C12 G55	12.0	$\varnothing \geq 14$	H3, 4, 5, 14, 15
	14- 11	C12 N55	12.2	$\varnothing \geq 16$	H3, 4, 5, 14
C18	14- 8	C18 G55	18.0	$\varnothing \geq 23$	H6, 7, 8, 9, 16
C25	7- 5	C25 N55	25.0	$\varnothing \geq 31$	H10, 11, 17, 18

Partial Profile 55° - BSP(G), BSF, BSW

Same insert for internal and external thread

Multi Flute

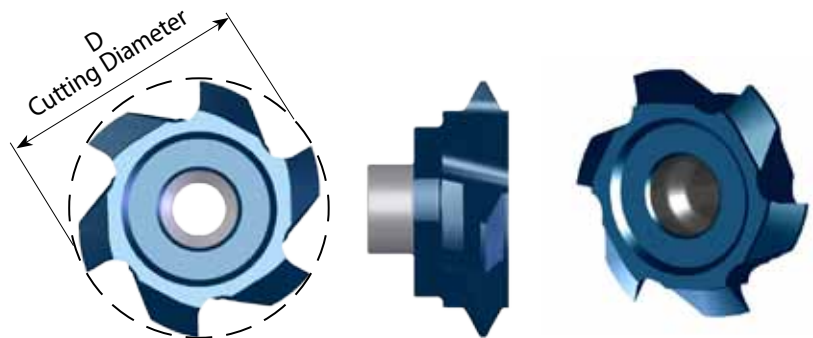

Insert Type	Ordering Code	Pitch Range TPI	D	No. of Flutes	Thread Dia (min)	Holder Code
S20	S195 F G55	14	19.5	6	$\varnothing \geq 23$	H6, 7, 8, 9, 16
	S200 D N55	8-6	20.0	4	$\varnothing \geq 25$	H16

* For complete toolholder description see pages 193 and 194